


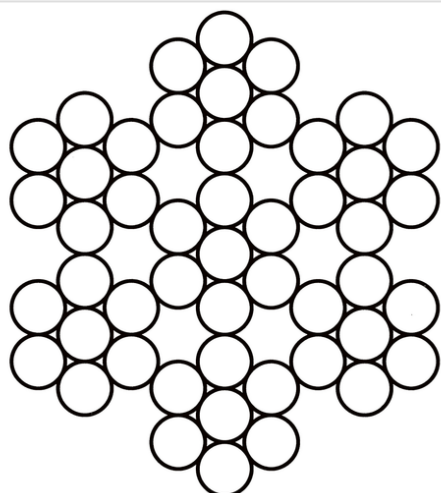

PMS

d Utilisation : architecture

Caractéristiques

Référence	couronne	Ø (mm)	poids (kg/ml)	rupture (kg)	rupture (kn)	Prix HT
7895	25 m	2	0,016	230	2,25	-
7897	25 m	3	0,038	500	4,90	-
7899	25 m	4	0,066	1000	9,80	-
7896	100 m	2	0,016	230	2,25	-
7901	25 m	6	0,144	2200	21,55	-
7898	100 m	3	0,038	500	4,90	-
7903	25 m	8	0,250	4100	40,20	-
7900	100 m	4	0,066	1000	9,80	-