

KTP
EVO 4

RÉF.
KTPEVO4



HARNAIS ANTICHUTE + LONGE ÉLASTIQUE 2 M AVEC ABSORBEUR D'ÉNERGIE INTÉGRÉ



CONCEPT UNIQUE



Le sac



Le harnais



La longe





CARACTÉRISTIQUES TECHNIQUES

- 1 • Harnais taille unique
- 2 • Sangles principales déperlantes en polyester 44 mm ($R \geq 25kN$)
- 3 • Sac réversible en néoprène fluo équipé d'un dossieret confort
- 4 • Réglages des bretelles par le bas à l'aide des boucles rapides mâle/femelle en acier finition époxy noire
- 5 • Sangle bavaroise 44 mm et cuissardes à fermeture par boucles automatiques acier finition zingué noir avec témoin de fermeture
- 6 • Point d'accrochage dorsal sur D métallique
- 7 • Boucles anti-garrot brevetées en acier zingué blanc
- 8 • Porte-longe amovible
- 9 • Large plaque dorsale en polypropylène
- 10 • Résistance statique $\geq 15 kN$
- 1 • Longe en gaine tubulaire polyester 1,2m (2m étendue), largeur 50mm
- 2 • Sangle à déchirement intégrée limitant la force d'arrêt à 450 daN
- 3 • Connecteur aluminium grande ouverture 60 mm
- 4 • Masse totale : 2,25 kg

DESCRIPTION

Les harnais de la gamme KTP proposés par NEOFEU, sont uniques sur le marché : le sac, le harnais et la longe indémontables composent un système de protection individuelle contre les chutes complet, utilisable instantanément.

Le KTP EVO 4 est composé d'un harnais antichute et d'une longe élastique avec absorbeur d'énergie intégré.



UTILISATION



Maintenance industrielle



Antenniste, climaticien



Construction métallique



Menuisier, storiste




Ramoneur



Entretien des ponts

TIRANT D'AIR ET FACTEURS

RÉFÉRENCE	LONGUEUR ANTICHUTE (déployé)	Masse Utilisateur max	TIRANT D'AIR		
			F0	F1	F2
KTPEVO4	2 m	100 kg	$\geq 2,75$ m	$\geq 4,75$ m	$\geq 5,90$ m

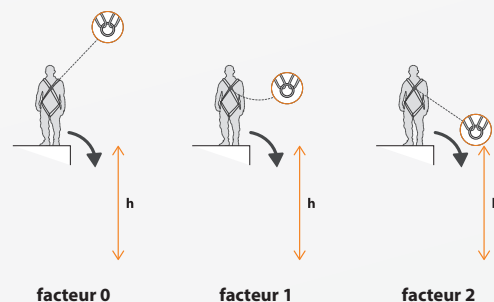

KTP
EVO 4

REF.
KTPEVO4



FULL BODY HARNESS + 2 M ELASTIC WEBBING LANYARD WITH INTEGRATED SHOCK ABSORBER



UNIQUE CONCEPT



The bag

The harness

The lanyard





TECHNICAL SPECIFICATIONS

- **Harness in unique size**
- 1 • Water repellent webbing in polyester 44 mm ($R \geq 25kN$)
- 2 • Reversible bag made of fluo neoprene fitted with a comfort back pad
- 3 • Shoulder straps adjustment pulling downwards with steel black powder coated quick buckles male/female
- 4 • Chest strap 44 mm and legs straps fastening through black zinc plated automatic buckles with locking indicator
- 5 • Back fall arrest D ring in metal
- 6 • Patented anti-trauma buckles in zinc plated steel
- 7 • Removable lanyard-holder
- 8 • Large back plate in polypropylene
- Static resistance ≥ 15 kN
- 9 • Lanyard with a tubular sheath 1,2m (2m extended), wide 50 mm
- Integrated tearing web limiting the braking force to 450 daN
- 10 • Aluminum connector with large opening 60 mm
- Total weight : 2,25 kg

DESCRIPTION

The KTP harnesses proposed by NEOFEU are unique on the market: the bag, the harness and the lanyard cannot be dismantled. They provide a complete personal protective system against fall, usable instantly.

The KTP EVO 4 is made up of a full body harness and of an elastic lanyard with integrated shock absorber.



USE



Industrial maintenance



Antenna, air-conditioning



Metal construction



Joiner, blind provider



Chimney sweep



Bridge maintenance

MINIMUM CLEARANCE AND FALL FACTORS

REFERENCE	FALL ARRESTER LENGTH (extended)	Max user weight	MINIMUM CLEARANCE		
			F0	F1	F2
KTPEVO4	2 m	100 kg	$\geq 2,75$ m	$\geq 4,75$ m	$\geq 5,90$ m

